

*Professional Power Amplifier*

Professional Power Amplifier

AXII



**DIGIRATE**

*AX SERIES POWER AMPLIFIER*

**AX2502MKII**

**OWNER'S MANUAL**


TECHNICAL PARAMETER'S CHANGERS ARE NOT INFORMED.

PROFESSIONAL POWER AMPLIFIER

Our product is improving. When the external form and parameter changes, please refer to the material object. We will not inform you especially.


1  
2  
3  
4  
5  
6  
7  
8  
9  
10

Speaker

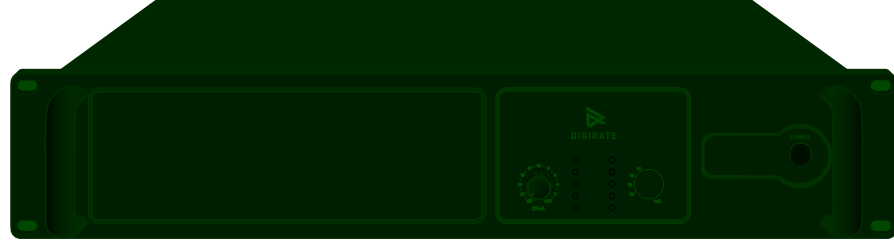

## SPECIFICATIONS

Model	AX2502MKII
Stereo power 1KHz0.1% THD	400W 630W 830W
Bridge mono Power 1KHz0.1% THD	1240W 1440W
Signal to noise	105dB
Slew Rate	60v/ s
Damping Factor	450:1
Frequency response	+/-0.1dB, 20Hz+20kHz
THD	0.01% Rated Power@8 1kHz
IMD	0.01% Rated Power@8
Input sensitivity	0.775V, 1.0V, 1.55V
LPF	20Hz-180Hz Valid
HPF	130Hz-20KHzValid
Input impedance	10K/20K ohms, unbalanced or balanced
Input CMRR	-75dB
Cross talk	-70dB
LEP indicator	Signal, Protect, Dctive, Clip/Limiting
Main power supply	-220V 50/60Hz FUSE:T10A
Weight	18Kg
Dimensions(mm)	483Wx420Dx88H

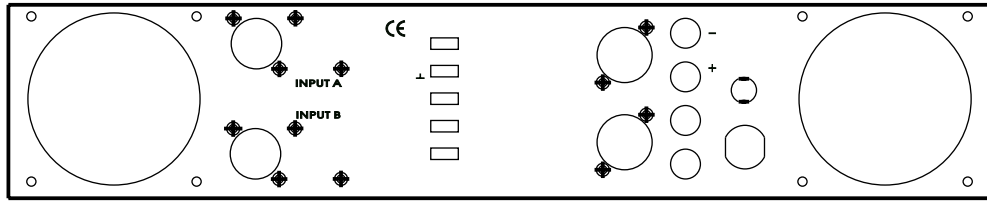

- 1 A
- 2
- 3 A XRL  
1 PIN 1 Ground)2 + PIN 2 Hot) 3 - PIN 3 Cold)
- 4 A XRL  
: 1 PIN 1 Ground)2 + PIN 2 Hot) 3 - PIN 3 Cold)
- 5 B (XRL)  
1 PIN 1 Ground)2 + PIN 2 Hot) 3 - PIN 3 Cold)
- 6 B (XRL)  
1 PIN 1 Ground)2 + PIN 2 Hot) 3 - PIN 3 Cold)
- 7 B 35
- 8 /  
1M
- 9  
4 8
- 10  
1 4  
2  
3
- 11 A/B / 20-180Hz )

1  
2  
3

LED

LED CLIP

LED CLIP

88  
● AX

4

AX

5

AX

SMPTE-IM

THD

6

7

20